



- 1 = 0 Volt / GND
- 2 = Channel 1 Input
- 3 = Channel 2 Input
- 4 = 0 Volt / GND
- 5 = +12 Volt Output
- 6 = -12 Volt Output



Cable part / Solder side

Type : LEMO FGG.3K.306.CLAC10

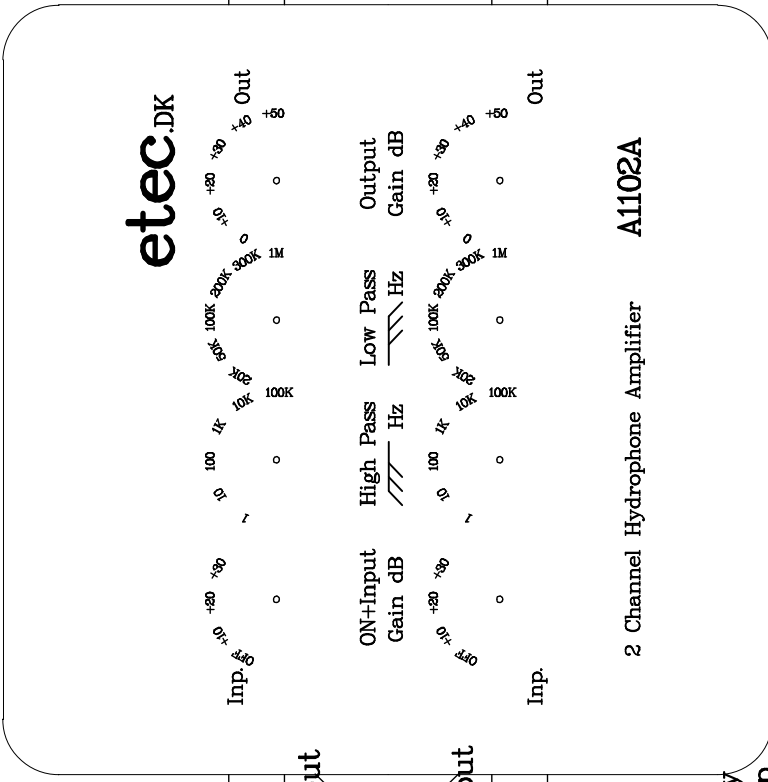

Channel 1 Input

Channel 2 Input

Size : LxWxH = 140x140x120

Weight : 25Kg

Enclosure and control buttons are splashproof but NOT watertight

Channel 1 Output

Green Lamp = Charging of Positive Battery

Charging Voltage / 8 to 30 Volt / AC or DC  
Charging Current / 0.1 to 2 amp / AC or DC

Green Lamp = Charging of Negative Battery

Channel 2 Output

The internal charger will turn off automatically when charging is complete. Batteries are 12Volt / 1.2AH / Sealed LEAD-ACID. Handle with care. Recycle when worn out. DO NOT EXPOSE TO CHOCKS OR HIGH TEMPERATURE.

Inputs may be used individually. Each channel consumes 40mAmp. Remember to switch OFF when not in use.

## A1102A Operators Quick Guide